

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA[®]
illuminotecnica

Brick Light

| |
|--|
| Article 411L6N |
| Product type wall recessed |
| Body material Die-casting aluminium EN47100, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation. Ring in die-casting aluminium EN47100 |
| Tempered glass diffuser in sand blasted finish 4mm thick and silicon gasket. |
| Screws in A2 stainless steel |
| Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre. |
| |
| |

IK03
IP65
Powered by
Citizen Electronics CLL130
6W 660lm 4000K RA80

Tranformer GE – IP67

Dimmable: NO

IP5X

IPX4



++ ÷



Colours available:

Black



ngg

Metalgrey





all

White



bgg

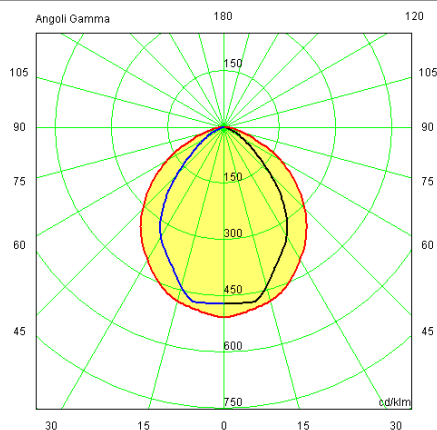

Accessory included:

BOX DIMENSION

