

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA[®]
illuminotecnica

Brick Light

Article 412L6H
Product type wall recessed
Body material Die-casting aluminium EN47100, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in sand blasted finish 4mm thick and silicon gasket.
Screws in A2 stainless steel
Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.
Ring in stainless steel AISI 316L 4mm thick

IK03
IP65
Powered by
Citizen Electronics CLL130
6W 600lm 3000°K RA80

Tranformer GE – IP67



Dimmable: NO

IP5X

IPX4



++ ÷

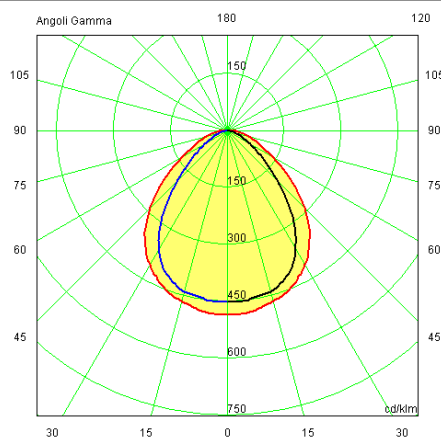

Accessory included:

BOX DIMENSION

