

# Technical data sheet

All right reserved Landa illuminotecnica S.p.A.  
will reserve to change the specific note without  
any written notice.

**LANDA**<sup>®</sup>  
illuminotecnica

## Brick Light

Article 412L6N
Product type wall recessed
Body material Die-casting aluminium EN47100, prior the painting process, washed with stones. Painting made by polyester powder with high resistant against oxidation.
Tempered glass diffuser in sand blasted finish 4mm thick and silicon gasket.
Screws in A2 stainless steel
Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.
Ring in stainless steel AISI 316L 4mm thick

IK03  
IP65  
Powered by  
Citizen Electronics CLL130  
6W 660lm 4000K RA80

Tranformer GE – IP67



Dimmable: NO

IP5X

IPX4



++ ÷

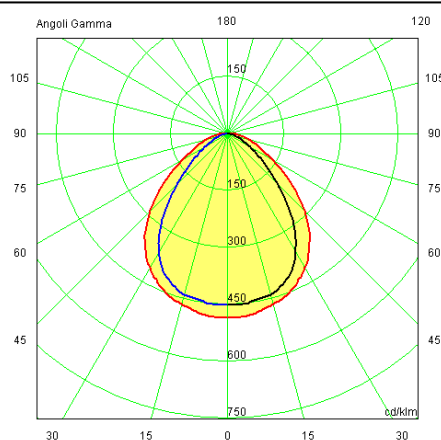

Accessory included:

BOX DIMENSION

