

Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.


Wall Mira 45

| |
|--|
| Article 4162L2N.INX Natural White 4162L2H.INX Warm White |
| Product type: recessed wall light |
| Body material Anodized aluminium AW 6060 |
| Polycarbonate diffuser in opal finish and silicon gasket. |
| Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre. |
| Ring in Aluminium AW 6060 anodized in inox color |
| <u>Transformer not included</u> |

IK08
IP66
Powered by
Cree XPG2
2W 24V DC


4162L2N.INX 190lm 4000°K Ra80
4162L2H.INX 190lm 3000°K Ra80

Supplied with 1 mt. cable -05RN-F
Dimmable: NO

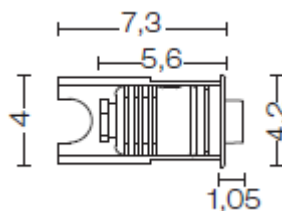

IP67 transformer available on request:
0409BT014 12W from 1 to 5 pcs.
0409BT015 25W from 1 to 10 pcs.

IP67 transformer on request:
0409BT016 100W from 1 to 42 pcs.

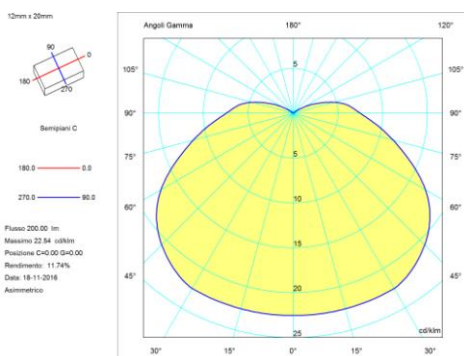

Accessories available on request:



code **0404M009**
Single connection IP68