
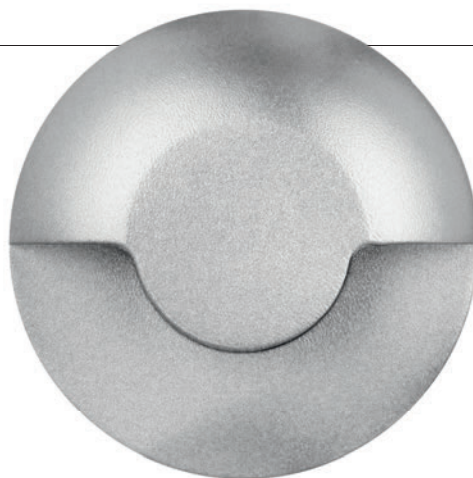


serie/series
**wall
mira 45**

LED
powered by
CREE XPG2

example code:
art. LED  anodized
4151 L2 H inx

art.
4151
4162
4163
4164
4165
4166




design Ufficio Tecnico Landa



4151




codeL2




4162




codeL2




4163




codeL2



4164




codeL2



RECESSED
18





corpo alluminio estruso
anodizzato
body in extruded anodized
aluminium
corps en aluminium extrudé
anodisé
cuerpo en aluminio
extrusionado y anodizado
Körper aus eloxiertem
fließgepresst Aluminium

diffusore policarbonato opale
diffuser opal polycarbonate
diffuseur polycarbonate
opaque
difusor policarbonato ópalo
Diffuser Polykarbonat opal



FOR TECHNICAL DETAILS VISIT
www.landa.it

IP66

art.	art.	art.	art.		W	V	Type		Ra
4151L2N	4162L2N	4163LL2N	4164LL2N		2	24	4000K 190LM	80	
4151L2H	4162L2H	4163LL2H	4164LL2H			d.c.	3000K 190LM	80	

ELECTRIFICATION

Transformer available:

cod. 0409BT014 to connect up to **5** pieces – GE LIGHTING IP67 24V d.c. 12W
cod. 0409BT015 to connect up to **10** pieces – GE LIGHTING IP67 24V d.c. 25W

Transformer on request:

cod. 0409BT016 to connect up to **42** pieces – GE LIGHTING IP67 24V d.c. 100W



LED & INSTALLATION

dettagli / details / details
detales / details:
p.A52 - A53

Energy efficiency classes

A++ ÷ A

wall
mira 45 (24V)



Projectors




Recessed



Contemporary




Traditional



RECESSED


19



4165




codeL2



4166









codeL2



....brz



....inx

art.	art.		W	V	Type		Ra
4165LL2N	4166LL2N		2	24	4000K 190LM		80
4165LL2H	4166LL2H		2	d.c.	3000K 190LM		80

Accessories on request:



code 0404M009
Single connection IP68



brz



inx

