

serie/series

lyras 65

LED

powered by
Philips Luxeon H50-2
AC direct connection
220/240V
Transformer not required

simmetrico
symmetric
symétriques
simétrico
symmetrisch

example code:

art.	LED		anodized
4699	L5	H	brz

art.
4699

design Ufficio Tecnico Landa

corpo alluminio estruso
anodizzato
body in extruded aluminium
corps en aluminium extrudé
anodisé
cuerpo en aluminio
extrusionado y anodizado
Körper aus eloxiertem
fließgepresst Aluminium

diffusore vetro trasparente
e opale
diffuser glass transparent
and opal
diffuseur verre transparent
et opaque
difusor vidrio transparente
y ópalo
Diffuser Glas klar und opal

PROJECTORS


8



4699 inox



4699 brz



FOR TECHNICAL DETAILS VISIT
www.landa.it

IP67

art.	LUX 1mt		art.	LUX 1mt		art.	LUX 1mt		W	V	Type	Ra
4699LS5H	2070	15°	4699LL5H	525	30°	4699L5H	92		5	220-240	3000K 400LM	80




ELECTRIFICATION

LED & INSTALLATION

dettagli / details / details
detalles / details:
p.A52 - A53

Energy efficiency classes

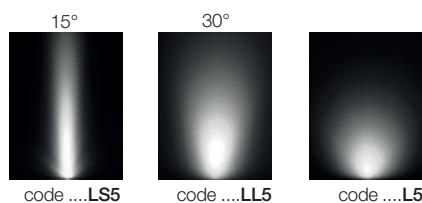


codeLS5 codeLL5 codeL5

A++ ÷ A

lyras 65 (AC/240V)

Projectors



Recessed



Contemporary



Traditional




9 | PROJECTORS



Accessories on request:



code 0404M009
Single connection IP68



code 00A469
Mounting spike

