Technical data sheet

All right reserved Landa illuminotecnica S.p.A.
will reserve to change the specific note without
any written notice.

LANDA illuminotecnica

Wall Mira 65

Article 4175LL5N.INX Natural White 4175LL5H.INX Warm White
Product type: recessed wall light
Body material Anodized aluminium AW 6060
Polycarbonate diffuser in opal finish and silicon gasket
Dimmable: NO
Recessed box is in a high density polyethylene with a security ring in nylon material loaded with 30% glass fibre.
Ring in Aluminium AW 6060 anodized in inox color
24V DC <u>Transformer not included</u>

IK08
IP66
Powered by
Cree XPG2

4175LL5N.INX 570lm 4000°K RA80
4175LL5H.INX 570lm 3000°K RA80

24V DC <u>Transformer not included</u>

Supplied with 1 mt. cable NS20N



IP67 transformer available on request:
0409BT014 12W from 1 to 2 pcs.
0409BT015 25W from 1 to 4 pcs.

IP67 transformer on request:
0409BT016 100W from 1 to 16 pcs.

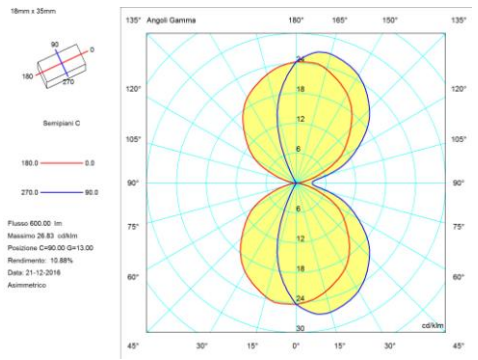

Accessories available on request:

code 0404M009
Single connection IP68

www.landa.it
LANDA ILLUMINOTECNICA S.p.A.
Via Rosmini, 13/15 - 25067 Lumezzane S.A. – Brescia – Italy - Tel. +39 030 89 20 966 - Fax +39 030 8921003
e-mail: info@landa.it - P.IVA IT00688140987 - Cod. Fiscale 02125310173